


Jens S. can offer a range of splicable polyurethane round belt from BEHA Innovation GmbH. From our stockholding you can get the standard round belts and the hollow in

various shores. Welding of the belts is possible in the dimensions Ø2mm to Ø15mm. The belts have a temperature range from -30°C to +80°C.

Round Belts Solid by the Meter

Profile	PU75A Red	PU75A Sky blue	PU80A Transparent	PU85A Green rough	PU85A Green	PU85A Sapphire blue	PU90 White	PU85A Black	TPE55D Beige	TPE63D Silver smooth reinforced
Shore	80	80	84	88	88	88	92	88	100	100
Material	PU	PU	PU	PU	PU	PU	PU	PU	TPE	TPE
Antistatic	no	no	no	no	no	no	no	yes	no	no
Recommended pretension, %	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	3 to 5	3 to 6	2 to 4	0,5-2
Low temperature flexibility	no	yes	no	no	no	no	no	no	no	no
Very good UV resistance	no	no	no	no	no	no	no	no	no	yes
EC/FDA/USDA compliant	no	yes	yes	no	no	yes	no	no	yes	yes
Brand	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral

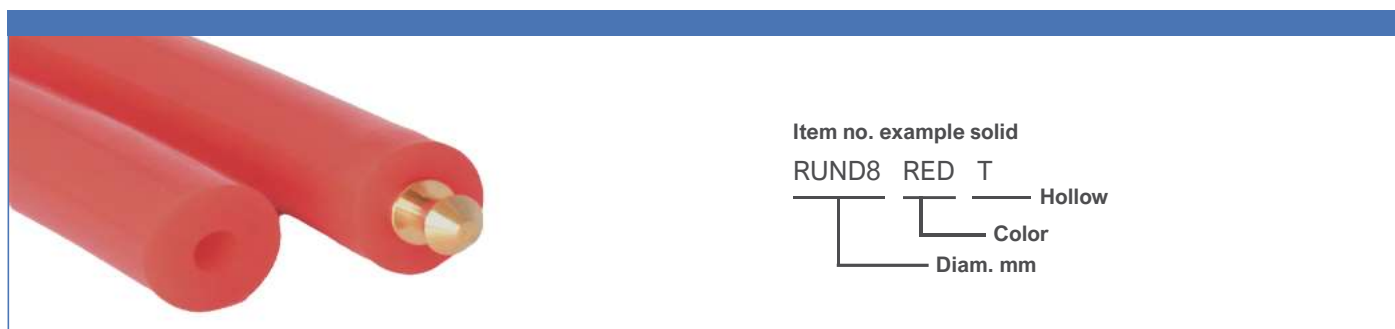

Round Belts Hollow by the Meter

Profile	PU75A Red	PU75A Sky blue	PU85A Green rough	PU85A Sapphire blue	PU85A Yellow	PU90 White	Nipple
Shore	80	80	88	88	88	88	88
Material	PU	PU	PU	PU	PU	PU	Brass
Antistatic	no	no	no	no	no	no	no
Recommended pretension, %	4 to 8	4 to 8	4 to 8	4 to 8	4 to 5	3 to 5	4 to 8
Low temperature flexibility	no	yes	no	no	no	no	no
Very good UV resistance	no	no	no	no	no	no	no
EC/FDA/USDA compliant	no	yes	no	yes	no	no	no
Brand	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral	Neutral


PU75A red smooth



PU75A sky blue smooth



PU80A transparent smooth

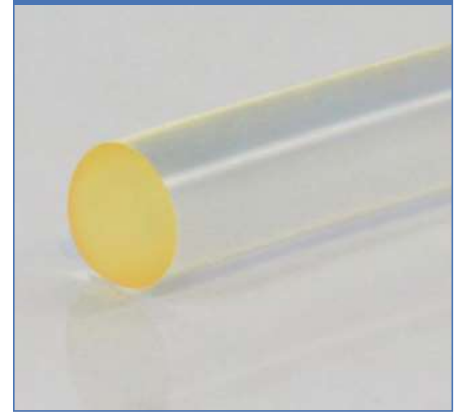

PU85A green rough



PU85A green smooth



PU85A black smooth



PU85A Sapphire blue smooth



PU90A white smooth



PU90A beige smooth



TPE63D silver smooth reinforced



PU75A Red Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight kg/100 m
RUND2R	PU75A red smooth	2	10	0,8	200	0,5
RUND3R	PU75A red smooth	3	20	1,8	200	0,9
RUND4R	PU75A red smooth	4	30	3,1	200	1,6
RUND4,8R	PU75A red smooth	4,8	35	4,5	200	2,2
RUND5R	PU75A red smooth	5	40	4,9	100	2,4
RUND6R	PU75A red smooth	6	50	7,3	100	3,4
RUND6,3R	PU75A red smooth	6,3	55	8	100	3,8
RUND7R	PU75A red smooth	7	60	9,8	100	4,7
RUND8R	PU75A red smooth	8	65	12,9	100	6
RUND9,5R	PU75A red smooth	9,5	75	18	100	8,5
RUND10R	PU75A red smooth	10	80	19,6	50	9,4
RUND12R	PU75A red smooth	12	90	29,4	50	13,5
RUND12,5R	PU75A red smooth	12,5	100	31,4	50	14,8
RUND15R	PU75A red smooth	15	120	45,1	50	21,5
RUND18R	PU75A red smooth	18	150	64,7	50	31
RUND20R	PU75A red smooth	20	170	80,4	50	40

PU75A Blue Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2SB	PU75A sky blue smooth	2	10	0,8	200	0,5
RUND3SB	PU75A sky blue smooth	3	20	1,8	200	0,9
RUND4SB	PU75A sky blue smooth	4	30	3	200	1,6
RUND4,8SB	PU75A sky blue smooth	4,8	35	4,4	200	2,2
RUND5SB	PU75A sky blue smooth	5	40	4,8	100	2,4
RUND6SB	PU75A sky blue smooth	6	50	6,8	100	3,4
RUND6,3SB	PU75A sky blue smooth	6,3	55	7,4	100	3,8
RUND7SB	PU75A sky blue smooth	7	60	9,2	100	4,7
RUND8SB	PU75A sky blue smooth	8	65	12	100	6
RUND9,5SB	PU75A sky blue smooth	9,5	75	17	100	8,5
RUND10SB	PU75A sky blue smooth	10	80	18,8	50	9,4
RUND12SB	PU75A sky blue smooth	12	90	27,2	50	13,5
RUND12,5SB	PU75A sky blue smooth	12,5	100	29,6	50	14,8
RUND15SB	PU75A sky blue smooth	15	120	42,4	50	21,5

PU80A Transparent Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2T	PU80A transparent smooth	2	15	1,1	200	0,5
RUND3T	PU80A transparent smooth	3	25	2,1	200	0,9
RUND4T	PU80A transparent smooth	4	30	4,1	200	1,6
RUND4,8T	PU80A transparent smooth	4,8	40	5,8	200	2,2
RUND5T	PU80A transparent smooth	5	45	6,2	100	2,4
RUND6T	PU80A transparent smooth	6	55	9	100	3,4
RUND6,3T	PU80A transparent smooth	6,3	60	10,1	100	3,8
RUND7T	PU80A transparent smooth	7	65	12,4	100	4,7
RUND8T	PU80A transparent smooth	8	75	16,1	100	6
RUND9,5T	PU80A transparent smooth	9,5	90	22,7	100	8,5
RUND10T	PU80A transparent smooth	10	95	25,3	50	9,4
RUND12T	PU80A transparent smooth	12	110	36,4	50	13,5
RUND12,5T	PU80A transparent smooth	12,5	115	39,4	50	14,8
RUND15T	PU80A transparent smooth	15	140	56,7	50	21,5
RUND18T	PU80A transparent smooth	18	170	81,5	50	31
RUND20T	PU80A transparent smooth	20	180	100,6	50	40

PU85A Green Rough						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2G	PU85A green rough	2	15	1,2	200	0,5
RUND3G	PU85A green rough	3	25	2,7	200	0,9
RUND4G	PU85A green rough	4	35	4,7	200	1,6
RUND4,8G	PU85A green rough	4,8	45	6,7	200	2,2
RUND5G	PU85A green rough	5	50	7,1	100	2,4
RUND6G	PU85A green rough	6	60	10,4	100	3,4
RUND6,3G	PU85A green rough	6,3	65	11,4	100	3,8
RUND7G	PU85A green rough	7	70	14,1	100	4,7
RUND8G	PU85A green rough	8	80	18,4	100	6
RUND9,5G	PU85A green rough	9,5	95	25,9	100	8,5
RUND10G	PU85A green rough	10	100	28,6	50	9,4
RUND12G	PU85A green rough	12	120	40,8	50	13,5
RUND12,5G	PU85A green rough	12,5	125	44,9	50	14,8
RUND15G	PU85A green rough	15	150	64,9	50	21,5
RUND18G	PU85A green rough	18	180	92,8	50	31
RUND20G	PU85A green rough	20	220	115,3	50	40

PU85A Green Smooth						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2GG	PU85A green smooth	2	15	1,2	200	0,5
RUND3GG	PU85A green smooth	3	25	2,7	200	0,9
RUND4GG	PU85A green smooth	4	35	4,7	200	1,6
RUND4,8GG	PU85A green smooth	4,8	45	6,7	200	2,2
RUND5GG	PU85A green smooth	5	50	7,1	100	2,4
RUND6GG	PU85A green smooth	6	60	10,4	100	3,4
RUND6,3GG	PU85A green smooth	6,3	65	11,4	100	3,8
RUND7GG	PU85A green smooth	7	70	14,1	100	4,7
RUND8GG	PU85A green smooth	8	80	18,4	100	6
RUND9,5GG	PU85A green smooth	9,5	95	25,9	100	8,5
RUND10GG	PU85A green smooth	10	100	28,6	50	9,4
RUND12GG	PU85A green smooth	12	120	40,8	50	13,5
RUND12,5GG	PU85A green smooth	12,5	125	44,9	50	14,8
RUND15GG	PU85A green smooth	15	150	64,9	50	21,5
RUND18GG	PU85A green smooth	18	180	92,8	50	31
RUND20GG	PU85A green smooth	20	220	115,3	50	40

PU85A Sapphire Blue Smooth						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2S	PU85A sapphire blue smooth	2	15	1	200	0,5
RUND3S	PU85A sapphire blue smooth	3	25	2,4	200	0,9
RUND4S	PU85A sapphire blue smooth	4	35	4,2	200	1,6
RUND4,8S	PU85A sapphire blue smooth	4,8	45	6,3	200	2,2
RUND5S	PU85A sapphire blue smooth	5	50	6,7	100	2,4
RUND6S	PU85A sapphire blue smooth	6	60	9,7	100	3,4
RUND6,3S	PU85A sapphire blue smooth	6,3	65	10,7	100	3,8
RUND7S	PU85A sapphire blue smooth	7	70	13,1	100	4,7
RUND8S	PU85A sapphire blue smooth	8	80	17,2	100	6
RUND9,5S	PU85A sapphire blue smooth	9,5	95	24,4	100	8,5
RUND10S	PU85A sapphire blue smooth	10	100	26,9	50	9,4
RUND12S	PU85A sapphire blue smooth	12	120	38,8	50	13,5
RUND12,5S	PU85A sapphire blue smooth	12,5	125	42,2	50	14,8
RUND15S	PU85A sapphire blue smooth	15	150	60,8	50	21,5

PU90A White Smooth						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2W	PU90A white smooth	2	20	1,9	200	0,5
RUND3W	PU90A white smooth	3	30	3,4	200	0,9
RUND4W	PU90A white smooth	4	40	5,9	200	1,6
RUND4,8W	PU90A white smooth	4,8	50	8,5	200	2,2
RUND5W	PU90A white smooth	5	55	9,3	100	2,4
RUND6W	PU90A white smooth	6	65	13,3	100	3,4
RUND6,3W	PU90A white smooth	6,3	70	14,6	100	3,8
RUND7W	PU90A white smooth	7	75	18,3	100	4,7
RUND8W	PU90A white smooth	8	85	23,8	100	6
RUND9,5W	PU90A white smooth	9,5	95	33,3	100	8,5
RUND10W	PU90A white smooth	10	105	37,3	50	9,4
RUND12W	PU90A white smooth	12	120	53,3	50	13,5
RUND12,5W	PU90A white smooth	12,5	125	58	50	14,8
RUND15W	PU90A white smooth	15	150	83,6	50	21,5
RUND18W	PU90A white smooth	18	185	119,8	50	31
RUND20W	PU90A white smooth	20	200	148,3	50	40

PU85A Black Smooth						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND3BL	PU85A black smooth	3	25	2,3	200	0,9
RUND4BL	PU85A black smooth	4	35	4,1	200	1,6
RUND5BL	PU85A black smooth	5	50	6,2	100	2,4
RUND6BL	PU85A black smooth	6	60	9,1	100	3,4

PU90A Beige Smooth						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND2B	TPE55D beige smooth	2	30	2,4	200	0,5
RUND3B	TPE55D beige smooth	3	35	5,6	200	0,9
RUND4B	TPE55D beige smooth	4	50	9,9	200	1,6
RUND4,8B	TPE55D beige smooth	4,8	60	14,4	200	2,2
RUND5B	TPE55D beige smooth	5	65	15,7	100	2,4
RUND6B	TPE55D beige smooth	6	75	22,4	100	3,4
RUND6,3B	TPE55D beige smooth	6,3	80	24,8	100	3,8
RUND7B	TPE55D beige smooth	7	90	30,4	100	4,7
RUND8B	TPE55D beige smooth	8	100	40	100	6
RUND9,5B	TPE55D beige smooth	9,5	120	56	100	8,5
RUND10B	TPE55D beige smooth	10	125	62,9	50	9,4
RUND12B	TPE55D beige smooth	12	150	90,6	50	13,5
RUND12,5B	TPE55D beige smooth	12,5	160	97,6	50	14,8
RUND15B	TPE55D beige smooth	15	180	140,8	50	21,5
RUND18B	TPE55D beige smooth	18	240	203,2	50	31
RUND20B	TPE55D beige smooth	20	300	251,2	50	40

TPE63D Silver Smooth Reinforced						
Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND9,5SIL	TPE63D silver smooth reinforced	9,5	140	59,4	500	8,5
RUND10SIL	TPE63D silver smooth reinforced	10	150	67	500	9,4
RUND12SIL	TPE63D silver smooth reinforced	12	190	96	500	13,5
RUND12,5SIL	TPE63D silver smooth reinforced	12,5	200	102,8	500	14,8

PU75A Red Smooth



PU75A Sky Blue Smooth



PU85A Green Rough



PU85A Sapphire Blue Smooth




PU85A Yellow Smooth



PU85A White Smooth



Nipple for Hollow Roundbelts

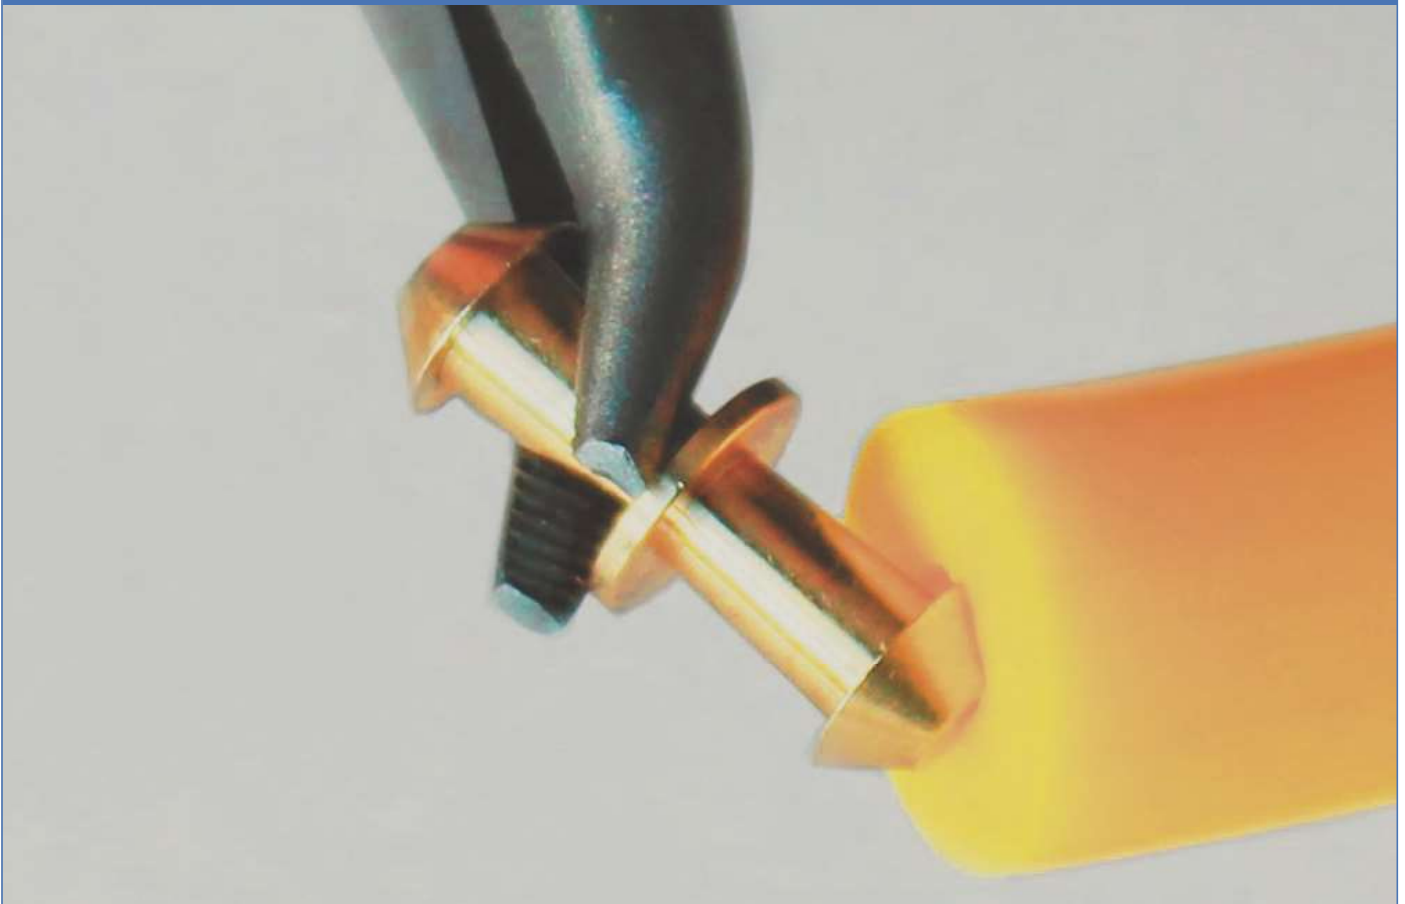

PU75A Red Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND4,8REDT	PU75A red smooth	4,8	30	3,7	200	1,8
RUND6,3REDT	PU75A red smooth	6,3	45	6,7	100	3,2
RUND8REDT	PU75A red smooth	8	55	10,8	100	5,1
RUND9,5REDT	PU75A red smooth	9,5	65	15,3	100	7,2
RUND12,5REDT	PU75A red smooth	12,5	85	26,1	50	12,4
RUND15REDT	PU75A red smooth	15	100	39,6	50	19

PU75A Sky Blue Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND4,8SBT	PU75A sky blue smooth	4,8	30	3,6	200	2,2
RUND6,3SBT	PU75A sky blue smooth	6,3	45	6,2	150	3,7
RUND8SBT	PU75A sky blue smooth	8	55	10	200	6
RUND9,5SBT	PU75A sky blue smooth	9,5	65	14,4	100	8,5
RUND12,5SBT	PU75A sky blue smooth	12,5	85	24,4	75	14,6
RUND15SBT	PU75A sky blue smooth	15	100	37,4	50	21

PU85A Green Rough

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND4,8GT	PU85A green rough	4,8	35	5,3	200	1,8
RUND6,3GT	PU85A green rough	6,3	55	9,4	100	3,2
RUND8GT	PU85A green rough	8	65	15,3	100	5,1
RUND9,5GT	PU85A green rough	9,5	75	20,4	100	7,2
RUND12,5GT	PU85A green rough	12,5	100	36,7	50	12,4
RUND15GT	PU85A green rough	15	120	59,1	50	19

PU85A Sapphire Blue Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND6,3BT	PU85A sapphire blue smooth	6,3	55	5,1	100	3,2
RUND8BT	PU85A sapphire blue smooth	8	65	9	100	5,1
RUND4,8ST	PU85A sapphire blue smooth	4,8	35	14,4	200	1,8
RUND9,5ST	PU85A sapphire blue smooth	9,5	75	20,6	100	7,2
RUND12,5ST	PU85A sapphire blue smooth	12,5	100	35	50	12,4
RUND15ST	PU85A sapphire blue smooth	15	120	53,5	50	19

PU85A Yellow Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND4,8RT	PU85A yellow smooth	4,8	35	5,3	200	1,8
RUND6,3RT	PU85A yellow smooth	6,3	55	9,4	100	3,2
RUND8RT	PU85A yellow smooth	8	65	15,3	100	5,1
RUND9,5RT	PU85A yellow smooth	9,5	75	20,4	100	7,2
RUND12,5RT	PU85A yellow smooth	12,5	100	36,7	50	12,4
RUND15RT	PU85A yellow smooth	15	120	57,1	50	19

PU85A White Smooth

Item no JENS S.	Product name	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg	Standard roll, m	Weight, kg/100 m
RUND4,8WT	PU90A white smooth	4,8	45	8,6	200	1,8
RUND6,3WT	PU90A white smooth	6,3	60	12,4	100	3,2
RUND8WT	PU90A white smooth	8	75	19	100	5,1
RUND9,5WT	PU90A white smooth	9,5	85	28,5	100	7,2
RUND12,5WT	PU90A white smooth	12,5	115	47,5	50	12,4
RUND15WT	PU90A white smooth	15	140	72,3	50	19

Nipple for Hollow Roundbelts

Item no JENS S.	Outer diameter, mm	Recommended pulley min Ø, mm	Fmax/belt, kg
RUND4,8RT-10	4,8	35	5,3
RUND6,3RT-10	6,3	55	9,4
RUND8RT-10	8	65	15,3
RUND9,5RT-10	9,5	75	20,4
RUND12,5RT-10	12,5	100	36,7
RUND15RT-10	15	120	57,1