


Jens S. have flanges available on stock. All flanges are of material steel and with a galvanized surface treatment.

Item No. JENS S	Inner diameter d, [mm]	Outer diameter D, [mm]	Thickness T, [mm]	No. of pulley teeth												
				5mm ST-RP- HD	8mm ST-RP- HD-PBG	14mm ST-RP- HD-PBG	T2,5	T5-AT5	T10-AT10	T20	XL	L	H	XH	XXH	
FL0/2S	10	18	1				16-18	10								
FL1/1S	15	23	1	12			24	12								
FL2S	16	24	1	14			25-26	14			12-13					
FL3S	19	27	1	15-16			28-30	15			14-15					
FL3/1S	21	29,5	1					16-17								
FL4S	22	30	1	17-18			32-34	16-18			16-17					
FL5S	25	33	1,5	20			35-37	19-20			18	10				
FL6S	28	36	1,5	21-22			38-40	21-22			19-20	11				
FL7S	31	40	1,5	24			42-44	24	12		21-23	12				
FL7/1S	31	47	1,5		16-17				13			13				
FL8S	35	46	1,5	26				25-27	14		24-26	14				
FL8/1S	36	50	1,5		18											
FL9S	39	50	1,5	28-30	19			28-30	15		27-29	15	12			
FL9/1S	41	55	1,5		20											
FL10S	43	55	1,5	32	21			31-33	16		30	16-17				
FL10/1S	47	57	1,5	34							32					
FL11S	47	62	1,5	36	22-23			34-36	17-18		36-36	18-19	14			
FL11/1S	51	67	1,5	38	24								15			
FL12S	53	67	1,5	40	25			37-40	19-20			20-21	16			
FL13S	56	73	1,5	44	26-27			41-42	21-22		40-42	22-23				
FL13/1S	60	77	1,5		28				23				17			
FL14S	64	80	1,5		29				24			24-25	18			
FL15S	68	84	1,5	48	30-31				25		48		19			
FL16S	71	88	1,5		32-33				26-27			26-27	20			
FL16/1S	75	90	1,5													
FL17S	78	94	1,5	56	35				28-29		52	28-29	21-22			
FL18S	80	98	1,5		36				30		57	30	23			
FL19S	83	100	1,5		37			60	31			31-32				
FL20S	88	104	1,5	60	38-39								24-25			
FL20/1S	90	108	1,5	64	40						60	33				
FL21S	93	108	1,5		41				32-33			34	26			
FL21/1S	94	111	1,5		42			66								
FL22S	96	113	1,5		43			68	34-35			35-36	27			
FL23S	102	118	1,5						36			37	28			
FL24/1S	105	127	1,5		46-47				38							
FL25S	108	134	2,5			28-29				20					18	
FL26S	112	129	1,5		48-49				39-40			40-41	30			
FL26/1S	115	131	1,5		50								31			
FL27S	115	142	2,5			30									19	
FL28S	120	137	1,5		51-52							42-43	32-33			
FL29S	122	150	2,5			31-32				22					20	
FL30S	126	142	1,5		53-54			86				44-45	34			
FL31S	130	145	1,5		55							46	35			

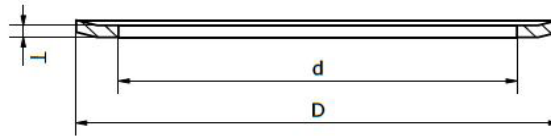

Item No. JENS S	Inner diameter d, [mm]	Outer diameter D, [mm]	Thickness T, [mm]	No. of pulley teeth													
				5mm ST-RP- HD	8mm ST-RP- HD-PBG	14mm ST-RP- HD-PBG	T2,5	T5-AT5	T10-AT10	T20	XL	L	H	XH	XXH		
FL32S	130	158	2,5			33-34					24					21	
FL33S	134	149	1,5		56-57								47				
FL34S	135	151	1,5		58								48	36			
FL34/1S	142	158	1,5		60-61								49	37			
FL35S	136	166	2,5			35-36					25					22-23	
FL36S	143	158	1,5							46			50-51	38			
FL36/1S	146	166	1,5		62								52	39			
FL37S	149	177	2,5			37-38										24	
FL38S	151	168	1,5		64-65								53-54	40			
FL39S	156	186	2,5			39-40										25	18
FL40S	158	175	1,5		66-67								55-56	41-42			
FL40/1S	161	182	1,5		68-70												
FL41S	165	191	2,5			41-42										26	
FL42S	166	182	1,5										57-58	43			
FL42/1S	170	191	1,5		71-72									44			
FL43S	166	200	2,5			43					30					27	19
FL44S	172	189	1,5										59-60	45-46			
FL45S	177	209	2,5			44-45					32						20
FL46S	182	199	1,5							60				47-48	28		
FL47S	180	202	1,5											49-50			
FL48S	194	216	2,5			48								51-53	30	21	
FL49S	208	232	2,5			50								54-56	32	22	
FL50	222	261	2,5			54-55								57-59	34	24	
FL51S	232	261	2,5			56-57								60-61	36	25	
FL51/1S	238	272	2,5		58-59									62-63		26	
FL52S	250	274	2,5		60									64-66	38		
FL52/1S	260	280	2,5		62									67-68	40	28	
FL53S	264	288	2,5			63-64							90	69-70			
FL55S	285	333	3			72											
FL56S	322	369	3			80											