


Jens S. have different types of splicable V-belts in different materials in stock. Link V-belts in classic profiles A/13 and B/17. Perforated rubber V-belts in rolls of open end in profiles Z/10, A/13, B/17 and C/22. Both plate connectors and link connectors (Z/10 only plate connectors).

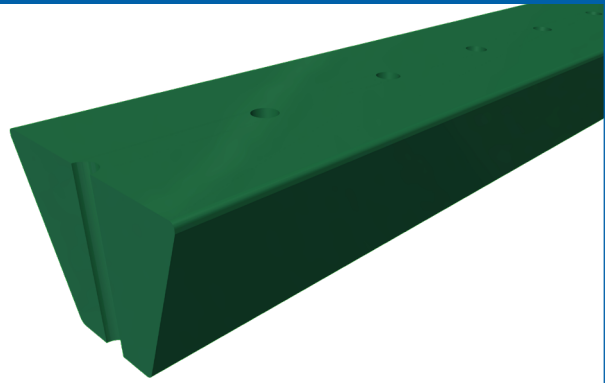

Profile		A/13	B/17	C/22	Z10
Belt width	b [mm]	13	17	22	10
Belt height	h mm]	8	11	14	6
Type		Wrapped	Wrapped	Wrapped	Wrapped
Material		NR	NR	NR	NR
Cord		PET	PET	PET	PET
Temperature range	°C	-20°C to +85°C	-20°C to +85°C	-20°C to +85°C	-20°C to +85°C
Standard		DIN 2216	DIN 2216	DIN 2216	DIN 2216
Brand		Neutral	Neutral	Neutral	Neutral

Belts

Item no JENS S.	Product name	Profile	Recommended pulley min Ø, mm	Standard roll, m	Weight kg/m
ZREM	Perforated V-belt green	Z/10	80	200	0,07
AREM	Perforated V-belt green	A/13	100	200	0,12
AREMPOL	Perforated V-belt red	A/13	100	140	0,12
BREM	Perforated V-belt green	B/17	140	200	0,2
CREM	Perforated V-belt green	C/22	224	200	0,34

Connectors

Item no JENS S.	Connector type	Product name	Profile	Material
ZREM-10	Plate	Perforated V-belt green	Z/10	Steel
AREM-10	Plate	Perforated V-belt green	A/13	Steel
AREM-11	Link	Perforated V-belt green	A/13	Steel
BREM-10	Plate	Perforated V-belt green	B/17	Steel
BREM-11	Link	Perforated V-belt green	B/17	Steel
CREM-10	Plate	Perforated V-belt green	C/22	Steel
CREM-11	Link	Perforated V-belt green	C/22	Steel